

# STARK HB DUO

LED A A+ A++



IP65



RAL Code

F

CLASS I



220-240V AC

CRI>80

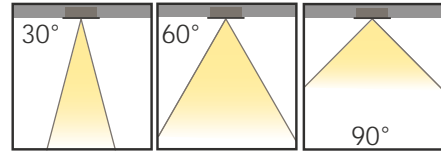

Extruded aluminium body with electrostatic powder coated,  
High efficiency reflector and extra clear tempered glass,  
Effective thermal design,  
50.000 hours Led lifetime,  
Narrow, medium and wide beam angle options,  
Emergency kit system can be integrated,  
Please inquire for optionzal power values.

*Elektrostatik toz boyalı alüminyum ekstrüzyon gövde,  
Yüksek verimli reflektör ve extra clear temperli cam,  
Etkili termal tasarım,  
50.000 saat Led yaşam ömrü,  
Dar, orta ve geniş açı seçenekleri,  
Acil aydınlatma kit sistemi uygulanabilir,  
Opsiyonel güç değerleri için bizimle iletişime geçebilirsiniz.*

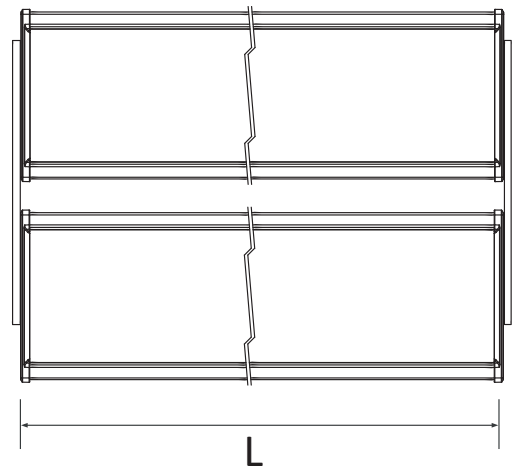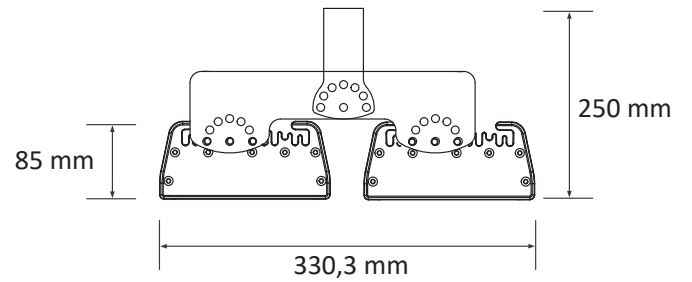

Consuming Power Tüketim Gücü	2X110W (L : 480 mm)	2X125W (L : 560 mm)	2X145W (L : 650mm)
---------------------------------	------------------------	------------------------	-----------------------

Light Source Işık Kaynağı	POWER LED		
------------------------------	-----------	--	--

Color Temperature Renk Sıcaklığı	3000K 4000K	5000K 6500K
-------------------------------------	----------------	----------------

Luminaire Output Lumen Armatür Çıkış Akısı	28600lm	33000lm	38860lm
---	---------	---------	---------

Efficiency Verimlilik	134lm/W		
--------------------------	---------	--	--

Power Factor Güç Faktörü	Pf>90		
-----------------------------	-------	--	--

Forward Current Sürüş Akımı	1050mA	1050mA	1050mA
--------------------------------	--------	--------	--------

Weight Ağırlık	10,50 Kg	11,50 Kg	14,60 Kg
-------------------	----------	----------	----------