


TINN-48

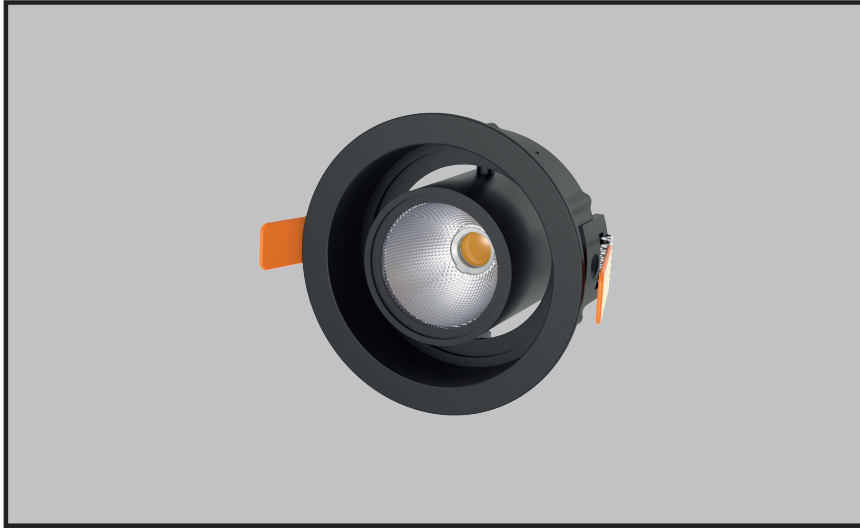

Adjustable




360°

15°

0,70
KG

CRI 80

CRI 90



LED A A+ A++

IP 20



RAL CODE



F



CLASS II



220-240V
AC

Die-cast aluminium body with electrostatic powder coated,
High efficiency reflector and PC glass,
Effective thermal design,
50.000 hours Led lifetime,
Medium and wide beam angle options,
Emergency kit system can be integrated,
Please inquire for optional power values.

Elektrostatik toz boyalı alüminyum döküm gövde,
Yüksek verimli reflektör ve PC Cam,
Etkili termal tasarım,
50.000 saat Led yaşam ömrü,
Orta ve geniş açı seçenekleri,
Acil aydınlatma kit sistemi uygulanabilir,
Opsiyonel güç değerleri için bizimle iletişime geçebilirsiniz.

Consuming Power

Tüketim Gücü

7W

9W

Light Source

Işık Kaynağı

COB LED

Color Temperature

Renk Sıcaklığı

2700K 5000K
3000K 6500K
4000K

Luminaire Output Lumen

Armatür Çıkış Akısı

735lm

945lm

Efficiency

Verimlilik

105lm/W

Power Factor

Güç Faktörü




Pf>90

Forward Current


Sürüş Akımı

180mA

200mA

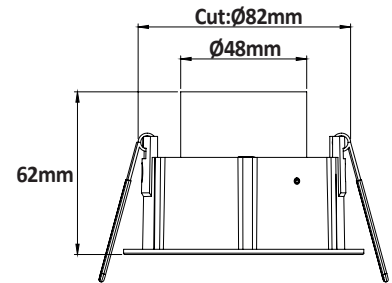

Rotate 15°



Rotate 360°