

BORDEN

LED A A+ A++







ADJUSTABLE



CRI>80

CRI>90



IP20

F



CLASS II

220-240V AC

DALI
switchDIM

Die-cast aluminium body with electrostatic powder coated,
High efficiency reflector and PC glass,
Effective thermal design,
50.000 hours Led lifetime,
Narrow, medium and wide beam angle options,
Emergency kit system can be integrated,
Please inquire for optional power values.

Elektrostatik toz boyalı alüminyum döküm gövde,
Yüksek verimli reflektör ve PC cam,
Etkili termal tasarım,
50.000 saat Led yaşam ömrü,
Dar, orta ve geniş açı seçenekleri,
Acil aydınlatma kit sistemi uygulanabilir,
Opsiyonel güç değerleri için bizimle iletişime geçebilirsiniz.

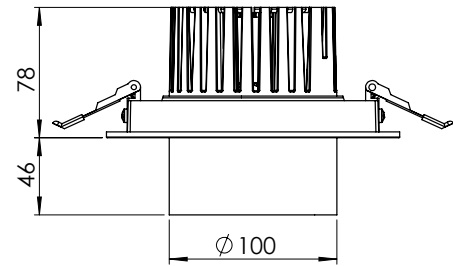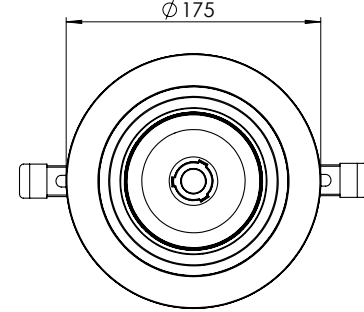

Consuming Power Tüketim Gücü	20W	28W	35W
--	-----	-----	-----

Light Source Işık Kaynağı	COB LED		
-------------------------------------	---------	--	--

Color Temperature Renk Sıcaklığı	2700K 3000K 4000K	5000K 6500K	
--	-------------------------	----------------	--

Luminaire Output Lumen* Armatür Çıkış Akısı	2096 lm	2950 lm	3678 lm
---	---------	---------	---------

Efficiency Verimlilik	105 lm/W
---------------------------------	----------

Power Factor Güç Faktörü	Pf>90
------------------------------------	-------

Weight Ağırlık	1.7 kg
--------------------------	--------

* Lümen değeri 4000K değerine göre verilmiştir.
Lumen value is given according to 4000K value.

