




GARDIN

LED A A+ A++

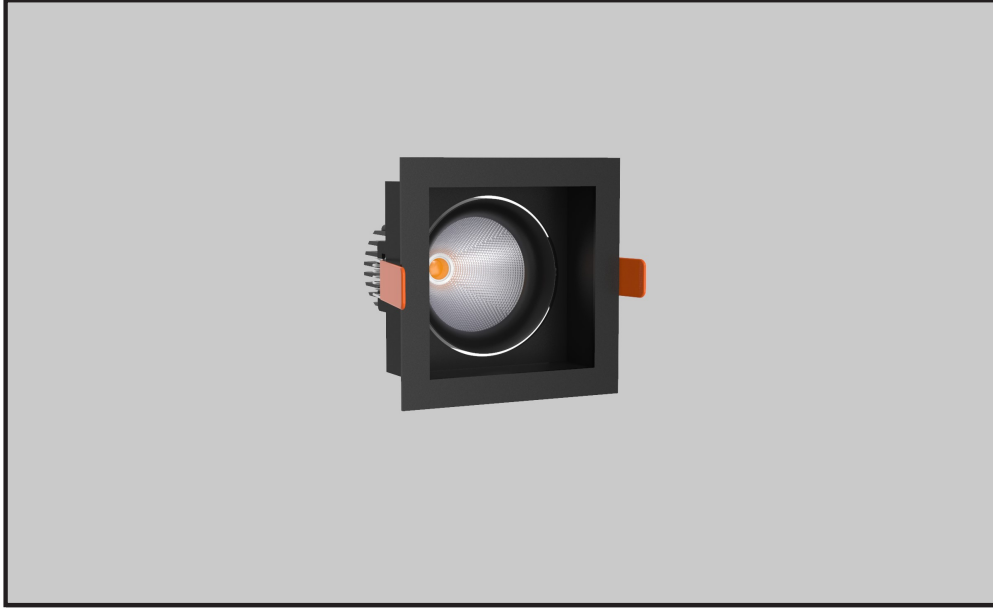

CRI>80 CRI>90

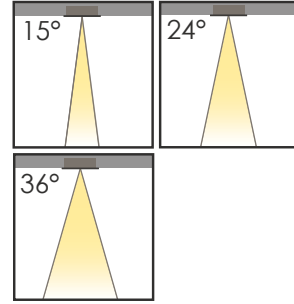

IP20

F

CLASS II

220-240V AC

DALI
switchDIM

Die-cast aluminium body with electrostatic powder coated,
High efficiency reflector and PC glass,
Effective thermal design,
50.000 hours Led lifetime,
Narrow, medium and wide beam angle options,
Emergency kit system can be integrated,
Please inquire for optional power values.

Elektrostatik toz boyalı alüminyum döküm gövde,
Yüksek verimli reflektör ve PC cam,
Etkili termal tasarım,
50.000 saat Led yaşam ömrü,
Dar, orta ve geniş açı seçenekleri,
Acil aydınlatma kit sistemi uygulanabilir,
Opsiyonel güç değerleri için bizimle iletişime geçebilirsiniz.

Consuming Power 7W 9W 14W
Tüketim Gücü

Light Source Işık Kaynağı	COB LED		
Color Temperature Renk Sıcaklığı	2700K 3000K 4000K	5000K 6500K	
Luminaire Output Lumen* Armatür Çıkış Akısı	700 lm	900 lm	1400 lm
Efficiency Verimlilik	100 lm/W		
Power Factor Güç Faktörü	Pf>90		
Weight Ağırlık	0.56 kg		

* Lümen değeri 4000K değerine göre verilmiştir.
Lumen value is given according to 4000K value.

