

LATT-8

LED A A+ A++




FIXED



RAL Code

CRI>80 CRI>90



IP20

F

CLASS II




220-240V AC

DALI

switchDIM

Die-cast aluminium body with electrostatic powder coated,
High efficiency opal diffusers,
Effective thermal design,
50.000 hours Led lifetime,
Emergency kit system can be integrated,
Please inquire for optional power values.

Elektrostatik toz boyalı alüminyum döküm gövde,
Yüksek verimli opal difüzör,
Etkili termal tasarım,
50.000 saat Led yaşam ömrü,
Acil aydınlatma kit sistemi uygulanabilir,
Opsiyonel güç değerleri için bizimle iletişime geçebilirsiniz.

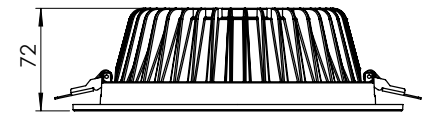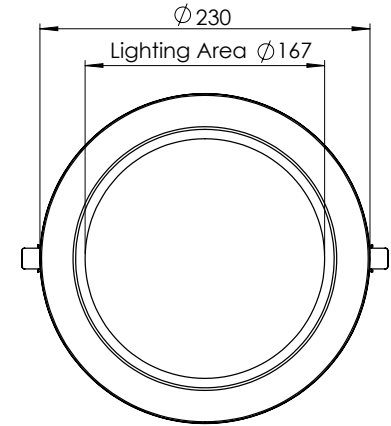

Consuming Power Tüketim Gücü	23W	30W
Light Source Işık Kaynağı	MP LED	
Color Temperature Renk Sıcaklığı	2700K 3000K 4000K	5000K 6500K
Luminaire Output Lumen * Armatür Çıkış Akısı	1978 lm	2580 lm
Efficiency Verimlilik	86 lm/W	
Power Factor Güç Faktörü	Pf>90	
Weight Ağırlık	1.04 kg	

* Lümen değeri 3000K değerine göre verilmiştir.
Lumen value is given according to 3000K value.