

REN TRIO

LED A A+ A++




RAL Code

ADJUSTABLE



CRI>80 CRI>90

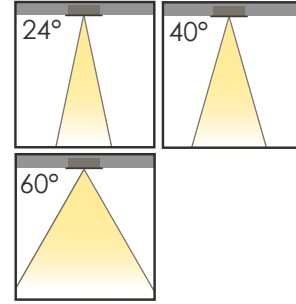

IP20

F

CLASS II

220-240V AC




DALI

switchDIM

Die-cast aluminium body with electrostatic powder coated,
High efficiency reflector and PC glass,
Effective thermal design,
50.000 hours Led lifetime,
Narrow, medium and wide beam angle options,
Emergency kit system can be integrated,
Please inquire for optional power values.

Elektrostatik toz boyalı alüminyum döküm gövde,
Yüksek verimli reflektör ve PC cam,
Etkili termal tasarım,
50.000 saat Led yaşam ömrü,
Dar, orta ve geniş açı seçenekleri,
Acil aydınlatma kit sistemi uygulanabilir,
Opsiyonel güç değerleri için bizimle iletişime geçebilirsiniz.

Consuming Power Tüketim Gücü	60W	84W	105W
Light Source Işık Kaynağı	COB LED		
Color Temperature Renk Sıcaklığı	2700K 3000K 4000K	5000K 6500K	
Luminaire Output Lumen* Armatür Çıkış Akısı	6828 lm	9600 lm	11970 lm
Efficiency Verimlilik	114 lm/W		
Power Factor Güç Faktörü	Pf>90		
Weight Ağırlık	4.7 kg		

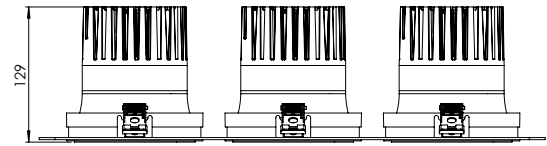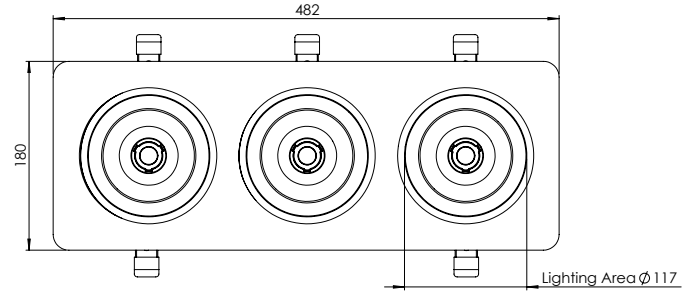

* Lümen değeri 4000K değerine göre verilmiştir.
Lumen value is given according to 4000K value.