


RPS 4D

LED A A+ A++




RAL Code

ADJUSTABLE



CRI>80

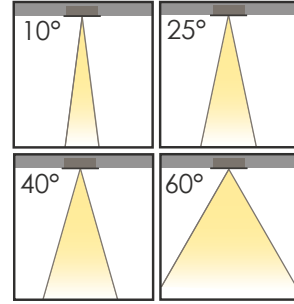

IP20

F

CLASS II

220-240V AC

DALI

switchDIM

Die-cast aluminium body with electrostatic powder coated,
High efficiency acrylic lens,
Effective thermal design,
50.000 hours Led lifetime,
Narrow, medium and wide beam angle options,
Emergency kit system can be integrated,
Please inquire for optional power values.

Elektrostatik toz boyalı alüminyum döküm gövde,
Yüksek verimli akrilik lens,
Etkili termal tasarım,
50.000 saat Led yaşam ömrü,
Dar, orta ve geniş açı seçenekleri,
Acil aydınlatma kit sistemi uygulanabilir,
Opsiyonel güç değerleri için bizimle iletişime geçebilirsiniz.

Consuming Power 5W 7W
Tüketim Gücü

Light Source HP LED
Işık Kaynağı




Color Temperature 2700K 5000K
Renk Sıcaklığı 3000K 6500K
4000K

Luminaire Output Lumen* 510 lm 714 lm
Armatür Çıkış Akısı

Efficiency 102 lm/W
Verimlilik

Power Factor Pf>90
Güç Faktörü

Weight 0.35 kg
Ağırlık

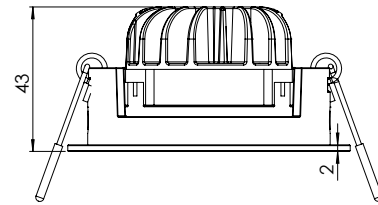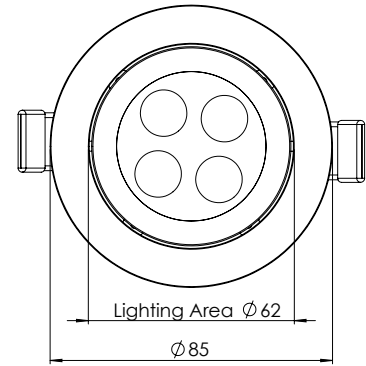

* Lümen değeri 3000K değerine göre verilmiştir.
Lumen value is given according to 3000K value.